

PRTA-2150 & PRTA-2200 AUTOMATIC STRETCH WRAPPING MACHINE



PHOENIX
CONVEYORIZED ROTARY ARM
PRTA-2150



PHOENIX
CONVEYORIZED ROTARY ARM
PRTA-2200

www.phoenixwrappers.com



SEMI-AUTO TURNTABLE
STRETCH WRAPPERS



ROTARY ARM STRETCH
WRAPPERS



CUSTOM
AUTOMATED SYSTEMS



HIGH SPEED AUTOMATED
STRETCH WRAPPERS



FULLY INTEGRATED
PACKAGING LINES

PRTA-2150 & PRTA-2200

AUTOMATIC STRETCH WRAPPING MACHINE



FILM COST SAVINGS

Multiple wrap cycles apply film only where required.

Separate up/down speeds save time & up to 10% reduction of stretch film costs.

Separate top/bottom wrap selections eliminate wasted revolutions of film.

Film saving logic eliminates film waste.



SAFETY MEASURES

Timed, impulse cut wire is only ON when cutting and cold to the touch in seconds.

Not hazardous to operator.

No permanent, constant heat source.

Pneumatic cut & wipe system with no mechanical drive thus, nothing gets caught in mechanical system.



MAINTENANCE WISE

2 1/2" Dia. Rollers on 3 3/4" center spacing. Other sizes available.

18" T.O.R height (Top Of Roller height) standard. Other heights available.

Every roller driven, loop to loop design.

Load sequencing programming included.

Cast iron bearing support.



DURABLE DESIGN

Variable Speed Drive Controlled Turntable Drive Motor.

Ring Bearing Drive Support (Precision)

#50 ANSI Chain Drive for Low Maintenance & Reliable Operation

Top quality commercially available components.

Meets all Cdn & US standards with

NOTHING BEATS THE BEST IN CLASS!

Auto Cut, Wipe & Film Tail Treatment:

Pneumatic system cuts (not tears), wipes, and brushes film to load...no film tail!

Heavier:

Built to last...the 4000 lbs. std. weight capacity is the heaviest in its class.

Faster:

Up tot 25RPM, it's the fastest wrapping speed in its class. Wrap more loads...faster.

Ultimate Control:

Best in Class controls. Simple yet powerful controls offer wrap flexibility and film savings.



AUTO CUT & WIPE, HEAVIER & FASTER...BEST IN CLASS!

GENERAL SPECIFICATIONS

Wrapping Speed	Variable up to 25RPM
Load Size	Max. 52" x 52"
Load Weight	Max. 4000 lbs.
Load Height	Up to 80"
Wrap Tension	Variable
Power Requirement	230 Vac. 20 Amp

Controls

3 Wrap Programs

Up/Down Speeds carriage

Top & Bottom Wrap Counters

Nema Rated Control Cabinet

Warranty

3 years-All Parts / 10 years-Frame

Lifetime warranty on Pre-stretch Rollers

Wrap up & Wrap up/ Down

Top Cover Pause

Separate

Separate 1-10 count

Machine

Table Speed (variable)

Load Weight

Load Size

Production Cap. 45loads/hr

Compact machine design for limitedspace plant locations

PRTA-2150

PRTA-2200

15RPM

25RPM

4000lbs

4000lbs

52"x52"

56"x56"

60 80loads/hr

Phoenix...**Best in Class** performance
at a **Best in Class** price!

www.phoenixwrappers.com

Get the Facts and Compare!

(514) 956-1525



The Stretch Wrapping Experts

PHOENIX PRTA 2150 AUTOMATIC ROTARY ARM MACHINE SPECIFICATIONS

PERFORMANCE

Production Speed	Up to 45-60 pallets per hour
Maximum Load Size	52" x 52" x 80" load size (80" Diagonal)
Maximum Load Weight	4000 lbs (1814 kg)

LOAD HANDLING

Wrapping Speed (Variable)	15 RPM
---------------------------	--------

SERVICE REQUIREMENTS

Electric Service Requirements	230 VAC / 3 PH / 60 HZ
Pneumatic Requirements	3 CFM @80 PSI


WARRANTY

3 Year Warranty
Lifetime warranty on the pre-stretch compound
carriage rollers

The Phoenix PRTA Series Advantage

This system is perfect for any wrapping application, excelling in particular at wrapping application that requires to wrap light or unstable loads or for speeds which would otherwise cause the load to topple due to high rotation speeds. Rugged all-structural steel construction reflects the durability of this machine. HSS tubing provides a strong and light-weight arm minimizing the driving forces required to rotate the arm. The rugged conveyors have been engineered for smooth and long-lasting operation.

Please visit www.phoenixwrappers.com for more detailed information about this machine model and all its available options.

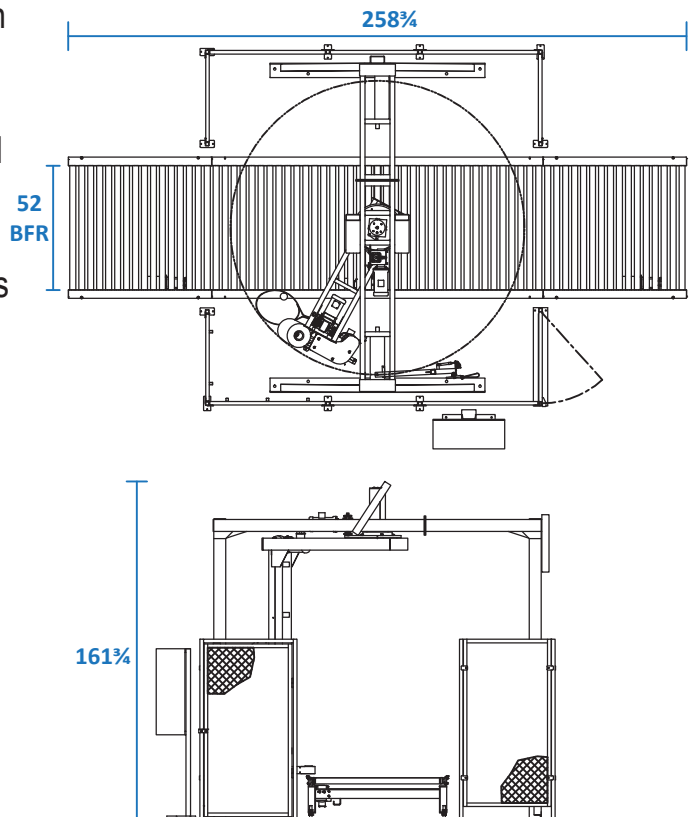

For more information call (514) 956-1525 or visit us at www.phoenixwrappers.com



The Stretch Wrapping Experts

PHOENIX PRTA 2200 AUTOMATIC ROTARY ARM MACHINE SPECIFICATIONS

PERFORMANCE

Production Speed	Up to 60-80 pallets per hour
Maximum Load Size	52" x 52" x 80" load size (74" Diagonal)
Maximum Load Weight	4000 lbs (1814 kg)

LOAD HANDLING

Wrapping Speed (Variable)	25 RPM
---------------------------	--------

SERVICE REQUIREMENTS

Electric Service Requirements	230 VAC / 3PH / 60 HZ
Pneumatic Requirements	3 CFM @80 PSI


WARRANTY

3 Year Warranty
Lifetime warranty on the pre-stretch compound carriage rollers

The Phoenix PRTA Series Advantage

This system is perfect for any wrapping application, excelling in particular at wrapping application that requires to wrap light or unstable loads or for speeds which would otherwise cause the load to topple due to high rotation speeds. Rugged all-structural steel construction reflects the durability of this machine. HSS tubing provides a strong and light-weight arm minimizing the driving forces required to rotate the arm. The rugged conveyors have been engineered for smooth and long-lasting operation.

Please visit www.phoenixwrappers.com for more detailed information about this machine model and all its available options.

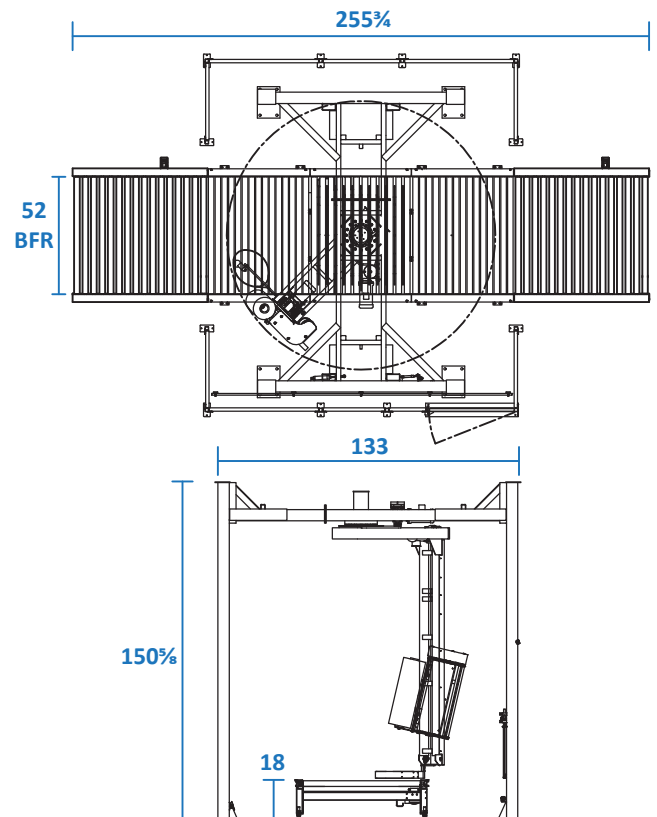

For more information call (514) 956-1525 or visit us at www.phoenixwrappers.com