


PurFlow NX+

i4.0 HFFS flow wrapper

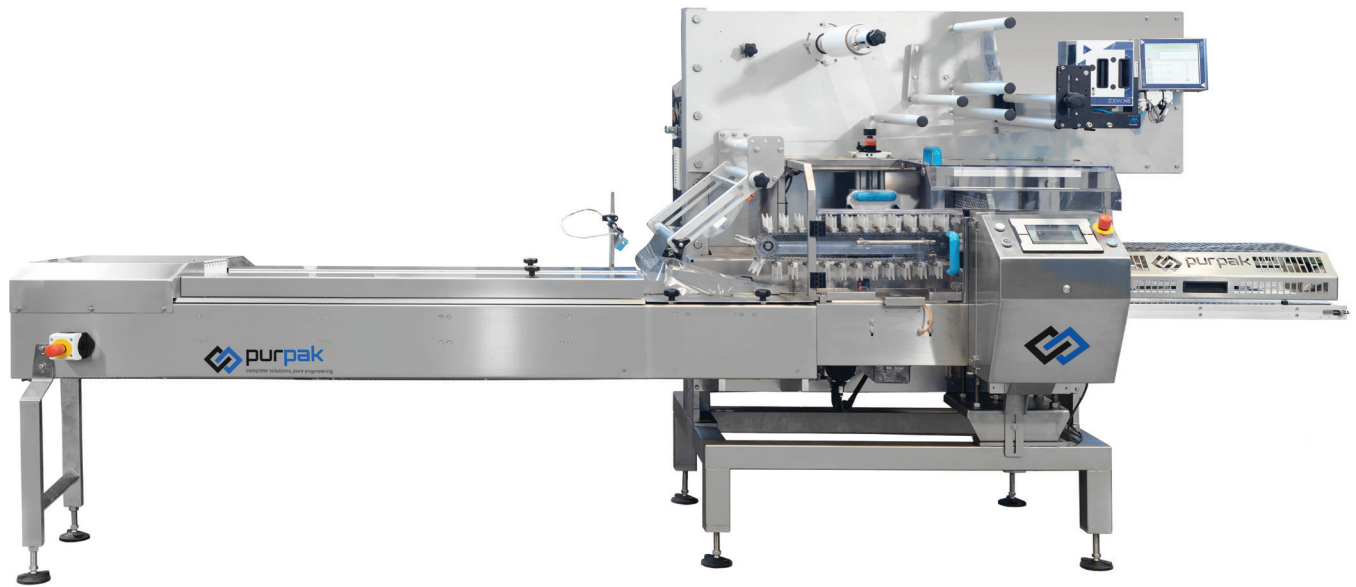

The PurFlow NX+ is built with the heavy demands of your production in mind. A modular, robust design with the latest industry 4.0 technology makes it the perfect fit for increasing production speeds and efficiencies.

modular design

adapt as your needs change

remote support

get the edge with PurPak's i4.0 features like remote support and many more

NPNB and MPP

reduce film waste and minimize downtime

up to 200ppm

increase your production per square foot.

SPECIFICATION

Machine speed	Up to 200ppm (product/film dependent)
Machine dimensions	14' 10"(L), 4' 5"(W)
Packaging materials	PP/OPP, paper, compostables, mono-materials and other heat / cold sealing materials.
Power requirement	208-480V 3 phase
Pneumatic consumption	2 litres / min
Pneumatic connection	80PSI / ø8 mm

KEY FEATURES

Color touchscreen HMI
OMAC pack ML logic
200 product recipe capacity (expandable)
Direct-drive servo drives
Auto-open fin wheels with film-burn protection (FBP)
Misplaced product detection (MPP)
No product / no bag (NPNB)
OEE dashboard*
Remote support*
9' 9" infeed with stainless steel deck plates and side guides
Offset quick-remove pushers
PEC for printed film error correction
Precise temperature control and adjustable sealing rollers
Extended infeed*
Heavy duty sealing head
2UP/double jaws*
Choice of seal patterns: vertical or horizontal*
Motorized film control
Dual film reel with auto-splice*
Adjustable folding box
Zig-zag knife*
Water cooled deck plates*
Hand-fed to fully-automated feeding*
Film perforation*
Many more...

*optional